
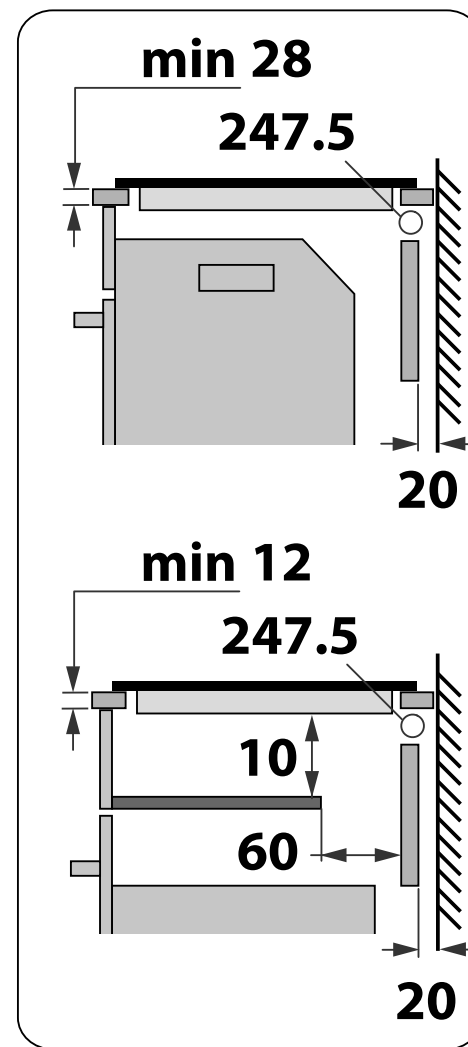


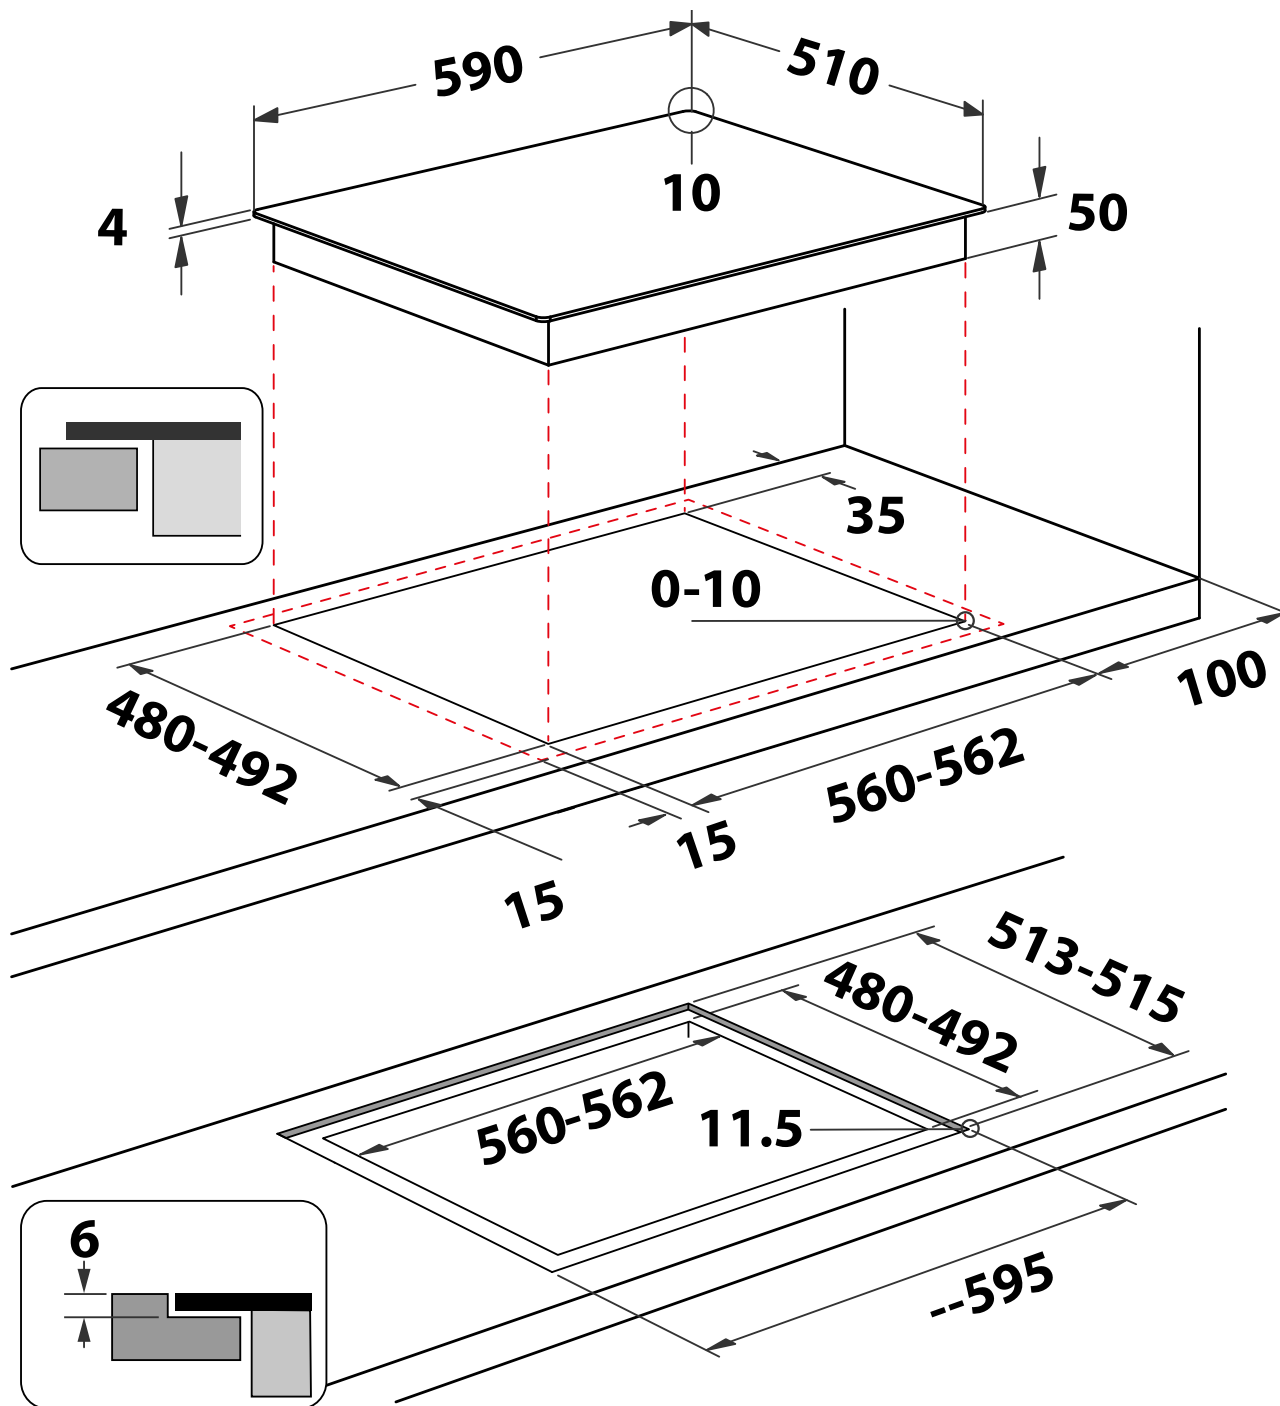

| DIMENSION                                                                  |  |  | MEASURE      |  |  | DIMENSION                                                                                                           |  |  | MEASURE       |  |  |
|----------------------------------------------------------------------------|--|--|--------------|--|--|---------------------------------------------------------------------------------------------------------------------|--|--|---------------|--|--|
| APPLIANCE                                                                  |  |  |              |  |  | Indicates whether a protection tray against heat or contact is needed with oven. Default is "N"                     |  |  | No            |  |  |
| Product width                                                              |  |  | 590          |  |  | Indicates whether a ventilation opening in the back side of cabinet is needed or not with oven. Default is "Y"      |  |  | Yes           |  |  |
| Product depth                                                              |  |  | 510          |  |  | Indicates the position of the opening in the back side of the cabinet with oven                                     |  |  | Top           |  |  |
| Radius of product corner                                                   |  |  | 10           |  |  | MIN Width of rear opening required with oven                                                                        |  |  | 550           |  |  |
| Product height (MAX protrusion from the worktop)                           |  |  | 4            |  |  | MIN Depth of rear opening required with oven.                                                                       |  |  | 45            |  |  |
| Underneath the bearing area of the appliance                               |  |  | 50           |  |  | MIN AREA of rear opening required with oven                                                                         |  |  | 247.5         |  |  |
| Distance between cut out and top frontal projection                        |  |  | 15           |  |  | MIN distance from cabinet to rear wall, with oven                                                                   |  |  | 20            |  |  |
| Distance between cut out and top lateral projection                        |  |  | 15           |  |  | Indicates whether a ventilation opening in the top front side of cabinet is needed or not with oven. Default is "N" |  |  | No            |  |  |
| Plateau thickness                                                          |  |  | 4            |  |  | MIN Frontal gap required, with oven (2)                                                                             |  |  | 0             |  |  |
| Gas outlet positioning                                                     |  |  | N/A          |  |  | MIN frontal opening area required with oven                                                                         |  |  | 0             |  |  |
| Gas outlet X positioning                                                   |  |  | 0            |  |  | WITH CABINET                                                                                                        |  |  |               |  |  |
| Gas outlet Y positioning                                                   |  |  | 0            |  |  | MIN worktop thickness with cabinet                                                                                  |  |  | 12            |  |  |
| Power cable                                                                |  |  | With product |  |  | MAX worktop thickness with cabinet                                                                                  |  |  | 0             |  |  |
| Power cable positioning                                                    |  |  | Rear left    |  |  | Indicates whether a protection tray against heat or contact is needed. Default is "Y"                               |  |  | Yes           |  |  |
| CUT OUT                                                                    |  |  |              |  |  | MIN distance from bottom line of appliance to protection tray                                                       |  |  | 10            |  |  |
| MIN front distance from cut-out to end worktop                             |  |  | 0            |  |  | Indicates whether a ventilation opening in the tray is needed or not with cabinet                                   |  |  | Yes           |  |  |
| MIN rear distance from cut out to wall/furniture                           |  |  | 35           |  |  | Recess dimension X                                                                                                  |  |  | 0             |  |  |
| MIN lateral distance from cut out to wall/furniture                        |  |  | 100          |  |  | Recess dimension Y                                                                                                  |  |  | 0             |  |  |
| MIN height from worktop to above furniture                                 |  |  | 400          |  |  | Positioning dimension X by axis                                                                                     |  |  | 45            |  |  |
| MIN cut out width                                                          |  |  | 560          |  |  | Distance of the tray from the back panel/wall                                                                       |  |  | 60            |  |  |
| MAX cut out width                                                          |  |  | 562          |  |  | Indicates whether a divider is available                                                                            |  |  | N/A           |  |  |
| MIN cut out depth                                                          |  |  | 480          |  |  | Indicates whether a ventilation opening in the back side of cabinet is needed or not. Default is "Y"                |  |  | Yes           |  |  |
| MAX cut out depth                                                          |  |  | 492          |  |  | Indicates the position of the opening in the back side of the cabinet.                                              |  |  | Top           |  |  |
| MIN cut out radius                                                         |  |  | 0            |  |  | MIN Width of rear opening of the cabinet                                                                            |  |  | 550           |  |  |
| MAX cut out radius                                                         |  |  | 10           |  |  | MIN Depth of rear opening of the cabinet                                                                            |  |  | 45            |  |  |
| FLUSH INSTALLATION                                                         |  |  |              |  |  | MIN AREA of rear opening of the cabinet                                                                             |  |  | 247.5         |  |  |
| Indicates whether a flush installation is possible. Default is "N"         |  |  | Yes          |  |  | MIN distance from cabinet to rear wall                                                                              |  |  | 20            |  |  |
| MIN Milling rabbet width                                                   |  |  | 593          |  |  | Indicates whether a ventilation opening in the top front side of cabinet is needed or not. Default is "N"           |  |  | No            |  |  |
| MAX Milling rabbet width                                                   |  |  | 595          |  |  | MIN Frontal gap of the cabinet                                                                                      |  |  | 0             |  |  |
| MIN Milling rabbet depth                                                   |  |  | 513          |  |  | MIN frontal opening area of the cabinet                                                                             |  |  | 0             |  |  |
| MAX Milling rabbet depth                                                   |  |  | 515          |  |  | INSTALLATION SPACE                                                                                                  |  |  |               |  |  |
| Milling rabbet thickness                                                   |  |  | 6            |  |  | Depth of immersion underneath the appliance                                                                         |  |  | 0             |  |  |
| Radius milling rabbet                                                      |  |  | 11.5         |  |  | Width protruding area below bottom box                                                                              |  |  | 0             |  |  |
| Flush installation KIT (2)                                                 |  |  | N/A          |  |  | Depth protruding area below bottom box                                                                              |  |  | 0             |  |  |
| Indicates the minum worktop thickness with standard installation for gas   |  |  | 0            |  |  | Protruding area: X positioning                                                                                      |  |  | 0             |  |  |
| Indicates the maximum worktop thickness with standard installation for gas |  |  | 0            |  |  | Protruding area: Y positioning                                                                                      |  |  | 0             |  |  |
| Indicates the minum worktop thickness with flush installation for gas      |  |  | 0            |  |  | ACCESSORIES FOR INSTALLATION                                                                                        |  |  |               |  |  |
| Indicates the maximum worktop thickness with flush installation for gas    |  |  | 0            |  |  | Gasket                                                                                                              |  |  | Pre assembled |  |  |
| WITH OVEN                                                                  |  |  |              |  |  | Clips                                                                                                               |  |  | Separate      |  |  |
| Indicates whether the cooktop can be installed above oven. Default is "Y"  |  |  | Yes          |  |  |                                                                                                                     |  |  |               |  |  |
| MIN worktop thickness with oven                                            |  |  | 28           |  |  |                                                                                                                     |  |  |               |  |  |
| MAX worktop thickness with oven                                            |  |  | 0            |  |  |                                                                                                                     |  |  |               |  |  |

| DIMENSION                                       |  | MEASURE |    |
|-------------------------------------------------|--|---------|----|
|                                                 |  | KIT     |    |
| Injector KIT                                    |  | N/A     |    |
| Elbow KIT                                       |  | N/A     |    |
| COOKTOP HOOD INSTALLATION ONLY FOR GAS          |  |         |    |
| MIN distance from cooktop to above furniture    |  | 0       | mm |
| MIN distance between cabinets above the cooktop |  | 0       | mm |
| MAX distance between cabinets above the cooktop |  | 0       | mm |