

iQ300, Built-under fridge, 82 x 59.8 cm, flat hinge  
KU21RVFE0G



|          |                                  |
|----------|----------------------------------|
| KF10ZAX0 | Door panel with decor frame      |
| KU20ZSX0 | Attachment door, stainless steel |

Built-under fridge: loads of space and easy access, with Door Alarm for worry-free storage where space is limited.

- ✓ superCooling: faster cooling for fresh food.
- ✓ safetyGlass shelves – Extra strong and easy to clean.

Energy Efficiency Class: ..... E  
Average annual energy consumption in kilowatt hour per year (kWh/a): ..... 93 kWh/annum  
Sum of volume of frozen compartments: ..... 0 l  
Sum of volume of chill compartments: ..... 134 l  
Airborne acoustical noise emissions : ..... 35 dB(A) re 1pW  
Airborne acoustical noise emission class: ..... B  
Built-in / Free-standing: ..... Built-in  
Door panel options: ..... Not possible  
Height: ..... 820 mm  
Width of the appliance: ..... 598 mm  
Dimensions: ..... 548 mm  
Required niche size for installation (HxWxD): ... 820 x 600 x 550 mm  
Weight: ..... 28.6 kg  
Fuse protection: ..... 10 A  
Door opening: ..... Right reversible  
Nominal power: ..... 220-240 V  
Frequency: ..... 50 Hz  
Length electrical supply cord: ..... 230.0 cm  
Number of compressors: ..... 1  
Number of independent cooling systems: ..... 1  
Interior ventilator: ..... No  
Reversible Door Hinge: ..... Yes  
Number of Adjustable Shelves in fridge compartment: ..... 2  
Shelves for Bottles: ..... No  
EAN code: ..... 4242003934029  
Brand: ..... Siemens  
Product name / Commercial code: ..... KU21RVFE0G  
Product category: ..... Upright fridge  
Frost free system: ..... Not applicable  
Installation type: ..... Fully integrated



## iQ300, Built-under fridge, 82 x 59.8 cm, flat hinge KU21RVFE0G

### Performance and Consumption

- EU19\_EEK\_D: E
- Total Volume : 134 l
- Annual Energy Consumption: 93 kWh/a
- Climate Class: SN-T
- Noise Level : 35 dB , EU19\_Noise emission class\_D: B

### Functions

- LED fridge light with Soft Start

### Design features

- Electronic control (LED chain)
- Optical and acoustical door open warning system
- Fresh mode
- Home Connect: iService Remote, Remote Monitoring and Control with Wi-Fi connectivity
- Super Cooling: automatic deactivation
- Automatic defrost in fridge section
- Easy clean interior

### Design features

- Net Fridge Volume : 134 l
- 2 door bins
- Bottle holder in x-deep door tray

### Freshness System

### Key features - Fridge section

- Right hinged door, door reversible
- Fully integrated
- Ventilation through plinth
- Length of power cord: 230 cm
- 220 - 240 V

### Dimension and installation

- Niche Dimensions: 82 cm H x 60 cm W x 55 cm D
- Dimensions: 82 cm H x 59.8 cm W x 54.8 cm D

### Key features - Freezer section

- KU21RVFE0G


### Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

### Additional features

iQ300, Built-under fridge, 82 x 59.8 cm, flat hinge  
KU21RVFE0G


measurements in mm  
Recommended gap dimensions for flat hinges



| F     | R   | X   |
|-------|-----|-----|
| 16-19 | 0-3 | 2.5 |
| 20    | 0-1 | 3   |
|       | 2-3 | 2.5 |
| 21    | 0-1 | 3   |
|       | 2-3 | 2.5 |
| 22    | 0   | 4   |
|       | 1   | 3.5 |
|       | 2-3 | 3   |

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

Measurements in mm




A: Substructure height


B: ≥ 560 mm (recommended)

Space for electrical connection next to the appliance on the left or right side

Measurements in mm

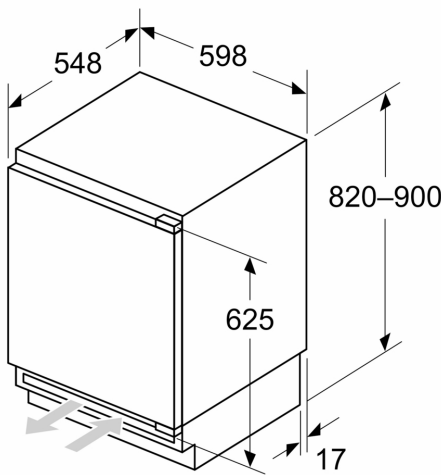


Measurements in mm

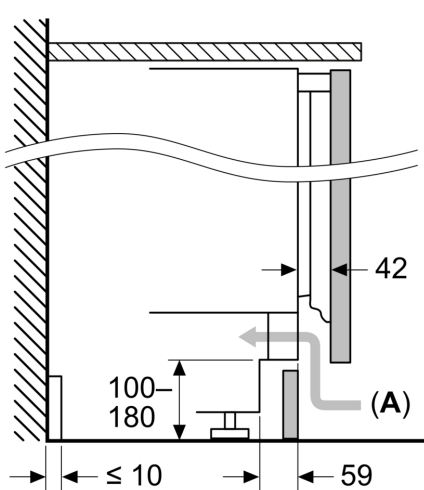

A: Air inlet ≥ 200 cm²

**Maximal permissible weight of the unit fronts**

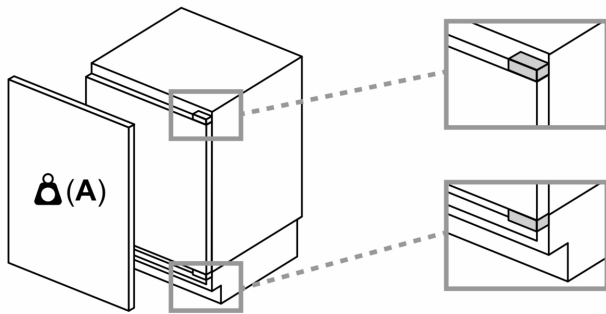

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

**A:** Weight  $\leq 12$  kg