

iQ100, Canopy cooker hood, 53 cm, Anthracite
LB53NAA30B



Optional accessories

LZ10INA00	Standard odor filter (replacement)
LZ10INT00	Standard recirculation kit

The powerful canopy cooker hood is concealed in a unit above the hob.

- ✓ Illuminate your cooking space with LED lights for optimal visibility and ambience setting.

Features

Technical Data	
Typology:	Built-in/Built-under
Length electrical supply cord:	150.0 cm
Required niche size for installation (HxWxD):	208mm x 493.0mm x 257mm mm
Height of the appliance:	208 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Weight:	5.0 kg
Control panel:	Mechanical
Number of speed settings:	3
Maximum output air extraction:	302 m³/h
Maximum output recirculating air:	300 m³/h
Maximum Air flow:	302 m³/h
Number of lights:	2
Noise level:	62 dB(A) re 1pW
Diameter of air outlet:	120 mm
Grease filter material:	Washable aluminium
EAN code:	4242003831717
Connection Rating:	121 W
Fuse protection:	5 A
Nominal power:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation type:	Built-in




iQ100, Canopy cooker hood, 53 cm, Anthracite
LB53NAA30B


Features	
Key performance features: • Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D) • Max. extraction rate: 302 m³/h • Noise max. Normal Level: Noise, max. speed in normal us: 62 dB dB* Features • Push button control for extractor speeds and light • 3 x power levels • 2 x 3W LED • Colour Temperature: 2700 K • 1 x metal grease filter cassette • Installation: integrated Design • Canopy hood • Mechanical Performance/technical information • Suitable for ducted and re-circulating operation • For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed • Extraction rate according to EN 61591: max. 302 m³/h • Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 62 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure) • Power rating: 121 W • Light Intensity: 78 lux • Electrical cable length 1.5 m • Diameter pipe Ø 120 mm (Ø 120 mm enclosed) • Dimensions exhaust air (HxWxD): 208-208 x 534 x 300 mm • Dimensions recirculating, chimney (HxWxD): 208-208 x 534 x 300mm • Built-in dimensions (HxWxD): 208 x 493 x 257 mm • Blower Efficiency Class: E* • Lighting Efficiency Class: D* • Grease Filtering Efficiency Class: D* • Average Energy Consumption: 67.7 kWh/year* Optional accessories • Recirculating kit LZ10INA00 * In accordance with the EU-Regulation No 65/2014	

**iQ100, Canopy cooker hood, 53 cm, Anthracite
LB53NAA30B**


Dimensioned drawings

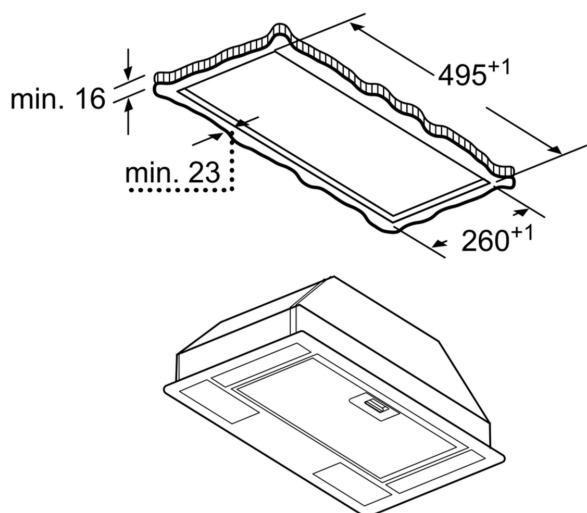


measurements in mm

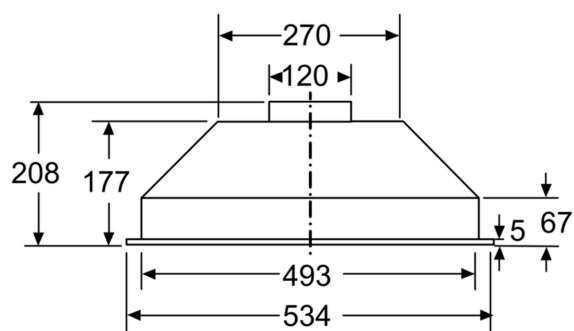

measurements in mm

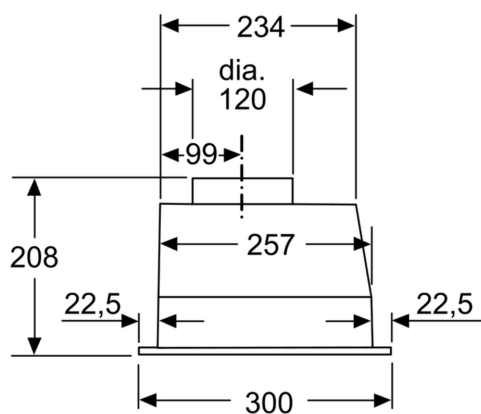

measurements in mm

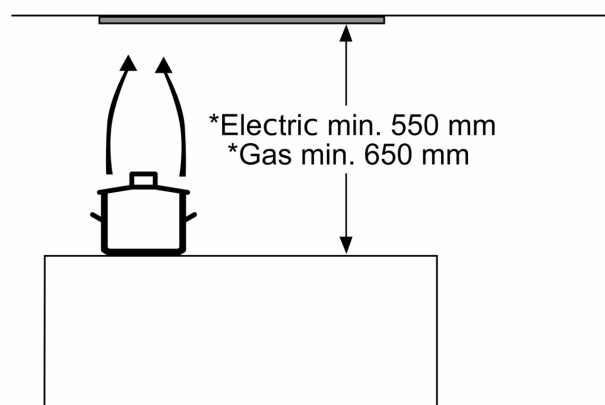

* from upper edge of
pan support

measurements in mm