SIEMENS

iQ700, Downdraft hood, 90 cm, clear glass, clear glass, Black LD98WMM60







- ✓ iQdrive motor - The quiet, high-performance motor ensures effective removal of odours and steam.
- ✓ Excellent extraction performance from all cooking zones – powered by iQdrive and Guided Air technology.
- ✓ cookConnect – Use your hob to control your extractor hood's power level and lighting.
- ✓ voiceControl – Control hood functions and lighting using your voice.
- ✓ Home Connect – The app that makes your hood work smarter.

Optional accessories

LZ21WWI17 Long-life Clean Air recirculation kit, LZ21WWJ12 Long Life recirculation kit, LZ21WWM11 Installation kit remote motor, LZ29WWY12 Mounting kit for seamless installation, LZ31WWX11 Flat duct adapt.round 90° DN150 Metal, LZ31XXX11 Aluflex pipe cyl. 150, HZ9VDSB1 90° flat duct bend horizontal, HZ9VDSB2 90° flat duct L vertical, HZ9VDSI0 Adapter round-flat, HZ9VDSI1 90° Adapter round-flat, HZ9VDSM1 Straight tube 500mm, HZ9VDSM2 Straight tube 1000mm, HZ9VDSS1 Connector sleeve (female), LZ21WWB16 Long-life Clean Air odor filter (repl.)

Features

Technical Data

Typology:	Downdraft
Length electrical supply cord:	130 cm
Required niche size for installation (HxWxD):	703 x 854.0 x 123 mm
Height of the appliance:	709 mm
Weight:	39.7 kg
Control panel:	Electronic
Number of speed settings:	3-stage + 2 intensive
Maximum output air extraction:	519 m³/h
Boost position output recirculating:	596 m³/h
Maximum output recirculating air:	456 m³/h
Boost position air extraction:	833 m³/h
Maximum Air flow:	519 m³/h
Noise level:	62 dB(A) re 1 pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable stainless steel
EAN code:	4242003907115
Connection Rating:	300 W
Fuse protection:	10 A
Nominal power:	220-240 V
Frequency:	50; 60 Hz
Plug type:	Gardy plug w/ earthing
Installation type:	Built-in

4 242003 907115

SIEMENS

iQ700, Downdraft hood, 90 cm, clear glass, clear glass, Black LD98WMM60

Features

- Installation: integrated

Design:

- Suitable for installation in an island or Semi-island kitchen solution
- Suitable for ducted and re-circulating operation
- not illuminated
- Type of frame: Top frame
- Top Frame suitable for seamless installation to create a unity with cooktop for a pure surface design

Core Features:

- Yes
- Glass straight extab.w.o.light
- iQdrive Motor
- The high quality filter cassettes with 2 integrated metal grease filters are dishwasher safe

Comfort Features:

- touchControl
- The standard functions are located on the right-hand user interface
- Spec. electronic: T34-SE2J
- Automatic after running (10 minutes)
- 3 power levels and 2 intensive settings
- Automatic reset from intensive to normal setting after 6 min
- climateControl Sensor
- cookConnect hob based hood control
- Fully automatic hood
- Grease and charcoal filter saturation indicators
- The filter service button automatically lifts filters into service position for easy removal

Digital Features:

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Interval function: available via Home Connect
- Silence function: available via Home Connect
- cookConnect hob based hood control: automatically activates the hood when cooking, thanks to the WiFi connection of hood and suitable hob.
- fully automatic Hood

Cleaning Comfort:

- The glass panel can be easily removed and cleaned
- 2 x metal grease filter cassettes

Exhaust Mode:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 229 m3/h ; noise level 41 dB (A) re1pW Speed 2: extraction rate 389 m3/h ; noise level 56 dB (A) re1pW Speed 3: extraction rate 519 m3/h ; noise level 62 dB (A) re1pW Intensive 1: extraction rate 656 m3/h ; noise level 67 dB (A) re1pW Intensive 2: extraction rate 833 m3/h; noise level 71 dB (A) re1pW
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 37.8 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: -*
- Grease Filtering Efficiency Class: C*

Recirculation Mode:

- For recirculation operation Long-life Clean Air recirculation kit (accessory) needed (**Starting production in October 2026)
- The Long-life Clean Air odour filter absorbs intense odours, such as fish, as well as pollen. The lifetime can be extended up to 4 times by refreshing the filter in the oven
- With the Long-life Clean Air recirculation kit (available as optional accessory) your appliance reaches according to EN61591 and EN 60704-3 the following values: Speed 1: extraction rate 229 m3/h noise level 41 dB (A) re1pW) Speed 2: extraction rate 389 m3/h noise level 56 dB (A) re1pW) Speed 3: extraction rate 519 m3/h noise level 62 dB (A) re1pW) Intensive 1: extraction rate 656 m3/h noise level 67 dB (A) re1pW) Intensive 2: extraction rate 833 m3/h noise level 71 dB (A) re1pW)

Technical Information and Sustainability:

- Made in Germany
- Consumption data:
- Power rating: 300 W
- Voltage: Nominal voltage: 220 - 240 V
- Sustainability:
- Available Long-life Clean Air odour filter with extended lifetime up to 4 times

Planning and Installation Information:


- For seamless worktop installation a special accessory is required
- Suitable for installation into 90 cm cabinet
- Extension height 250 mm
- Dimensions (HxWxD): 709 x 912 x 140 mm
- Built-in dimensions (HxWxD): 703 x 854 x 123 mm
- Extractor hose 150 mm
- Electrical cable length 1.3 m
- Blower
- Please reference the built-in dimensions provided in the installation drawings
- Not suitable for combination with gas hobs


SIEMENS

iQ700, Downdraft hood, 90 cm, clear glass, clear glass, Black
LD98WMM60

Dimensioned drawings

Measurements in mm






A: Installation of motor unit on front/rear or offset laterally with max. 3 m clearance (special accessory required)

Motor unit must always be accessible

B: 5.5 mm

Measurements in mm
Combination with electric hob
Standard, top-mounted installation




Standard: with worktop divider between downdraft and hob

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm

Measurements in mm
Standard, top-mounted installation

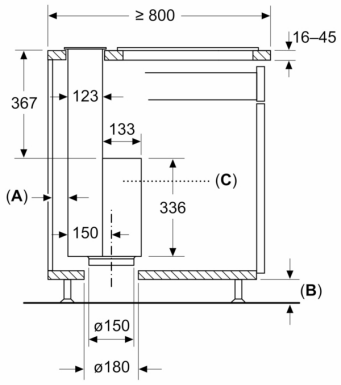

Standard: with worktop divider between downdraft and hob


A: ≥ 20 mm between the Guided Air suction area and a cabinet wall
B: ≥ 60 mm for air recirculation

≥ 100 mm for air extraction with ducting in the plinth

C: Motor unit must always be accessible

Measurements in mm
Seamless, top-mounted installation

(Special accessory required)

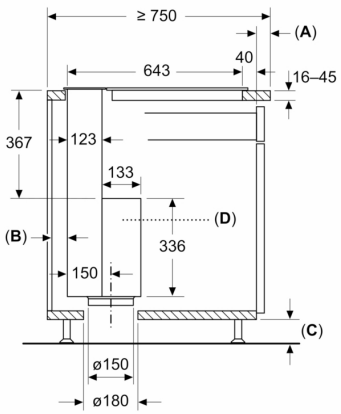

A: Worktop overlap to kitchen cabinet


B: ≥ 20 mm between the Guided Air suction area and a cabinet wall
C: ≥ 60 mm for air recirculation

≥ 100 mm for air extraction with ducting in the plinth
D: Motor unit must always be accessible

SIEMENS

Dimensioned drawings

Planning recommendation, air recirculation

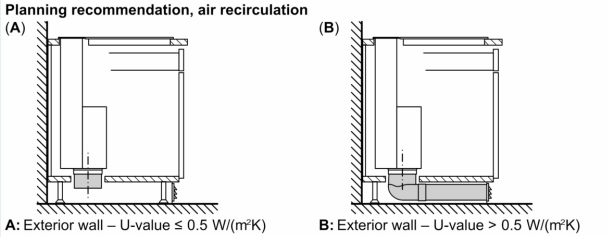


A: Exterior wall – U-value ≤ 0.5 W/(m²K)

Standard installation: Partially laid around the toe kick

B: Exterior wall – U-value > 0.5 W/(m²K)

Installation with fully laid pipework to the toe kick for poorly insulated exterior walls or above cold floors

Measurements in mm
Combination with electric hob
Seamless, top-mounted installation




A: Worktop overlap to kitchen cabinet

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm

Measurements in mm
Standard, top-mounted installation

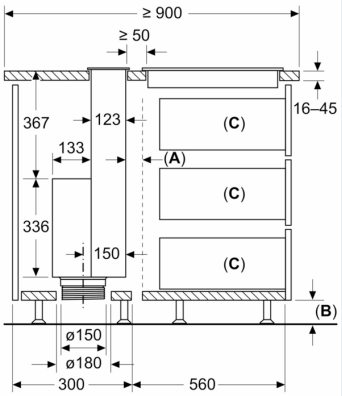

Standard: with worktop divider between downdraft and hob

A: Ventilation gap for hob

B: ≥ 60 mm for air recirculation


≥ 100 mm for air extraction with ducting in the plinth

C: Max. pull-out depth

Motor unit must always be accessible

Measurements in mm
Seamless, top-mounted installation

(Special accessory required)

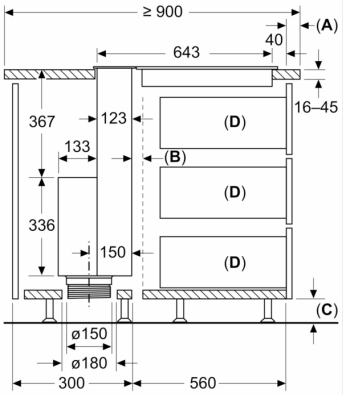

A: Worktop overlap to kitchen cabinet

B: Ventilation gap for hob


C: ≥ 60 mm for air recirculation

≥ 100 mm for air extraction with ducting in the plinth

D: Max. pull-out depth

Motor unit must always be accessible

Measurements in mm
Combination with electric hob
Seamless, top-mounted installation




A: Worktop overlap to kitchen cabinet

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm

Measurements in mm
Combination with electric hob
Standard, top-mounted installation



Standard: with worktop divider between downdraft and hob

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm