

Series 2, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK65DK60B



Optional accessories

DWZ1GK1A2 Standard odor filter (replacement)
DWZ1GK1U2 Standard recirculation kit

The Inclined Hood with Touch Select Basic Control and a low noise motor for an odor and noise free kitchen.

- **Especially silent:** maximum hood performance, minimum noise.
- **An impressive extraction rate of m³/h ensures this hood will have your kitchen odour free in no time.**
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.

Technical Data

Typology:Wall-mounted
Length of electrical supply cord: 150.0 cm
Height of the appliance: 375 mm
Minimum distance above an electric hob: 450 mm
Minimum distance above a gas hob: 650 mm
Net weight: 11.0 kg
Type of control:Electronic
Maximum output air extraction: 430 m³/h
Boost position output recirculating: 550.0 m³/h
Maximum output recirculating air: 445 m³/h
Boost position air extraction: 550 m³/h
Number of lights (Stck): 2
Noise level: 60 dB(A) re 1 pW
Diameter of air outlet: 150 mm
Grease filter material:Washable aluminium
EAN code: 4242005395934
Connection rating: 223 W
Fuse protection:4 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: GB plug
Installation type: Wall-mounted



Series 2, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK65DK60B

The Inclined Hood with Touch Select Basic Control and a low noise motor for an odor and noise free kitchen.

Planning and Installation Information:

- Dimensions exhaust air (HxWxD): 690-900 x 590 x 325 mm
- Dimensions recirculating (HxWxD): 720-975 x 590 x 325 mm
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Electrical cable length 1.5 m
- Back-pressure flap: Yes

Design:

- Inclined glass common design
- wall-mounted
- Black glass
- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed

Core Features:

- Capacitor motor
- 2 x LED lights
- Colour Temperature: 4000 K
- Light Intensity: 127 lux
- 1 metal grease filter(s).

Comfort Features:

- Electronic control via TouchControl, backlighted
- 3 power levels & intensive setting
- Automatic reset from intensive to normal setting after 5 min.
- Saturation indicator for metal and charcoal filter

Cleaning Comfort:

- Large opening angle of the glass plate with locking function for an easy filter accessibility and easy cleaning.
- Easy to clean smooth surfaces and materials.
- Removable metal grease filters dishwasher-safe

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 220 m³/h; noise level 46 dB (A) re1pW Speed 2: extraction rate 315 m³/h; noise level 53 dB (A) re1pW Speed 3: extraction rate 430 m³/h; noise level 60 dB (A) re1pW Intensive 1: extraction rate 550 m³/h; noise level 65 dB (A) re1pW

Performance Recirculation:


- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): Speed 1: extraction rate 215 m³/h; noise level 51 dB (A) re1pW Speed 2: extraction rate 300 m³/h; noise level 61 dB (A) re1pW Speed 3: extraction rate 445 m³/h ; noise level 69 dB (A) re1pW Intensive Speed 1: extraction rate 550 m³/h; noise level 72 dB (A) re1pW

Technical Information and Sustainability:


- Consumption data:
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 43.8 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: E*
- Power rating: 223 W
- Voltage: Nominal voltage: 220 - 240 V

Series 2, Wall-mounted cooker hood, 60 cm, clear glass black printed DWK65DK60B


Measurements in mm
Appliance in exhaust air mode

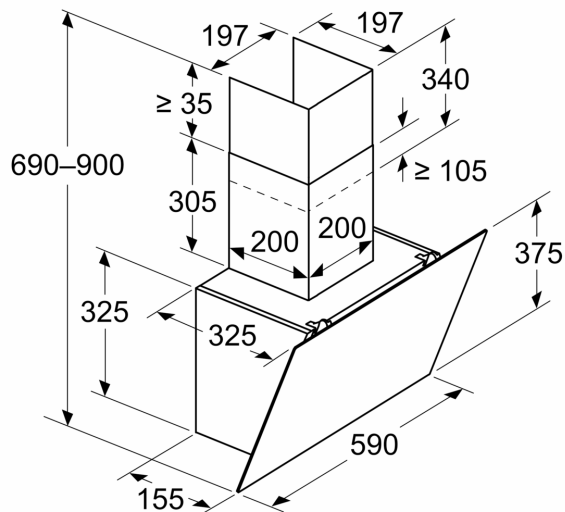

Measurements in mm
Appliance in circulated air mode

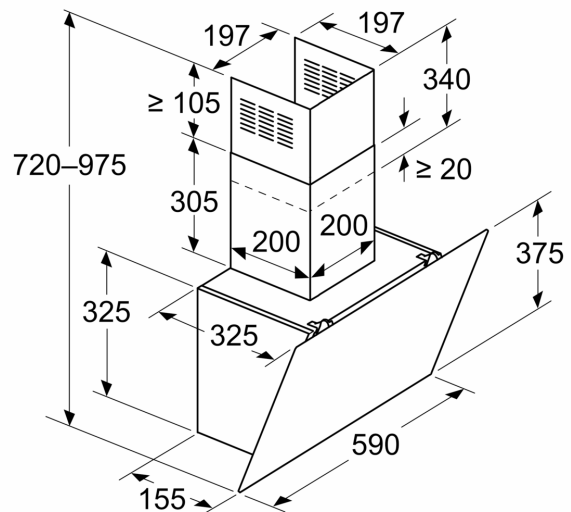


Measurements in mm

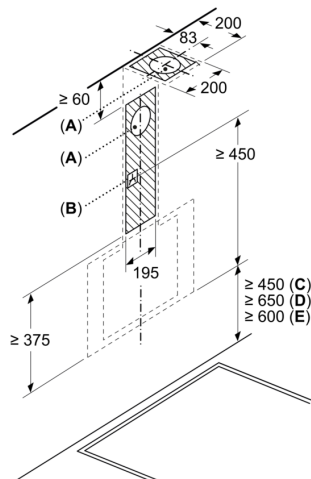


- A: Exhaust-air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm
Wall installation with chimney

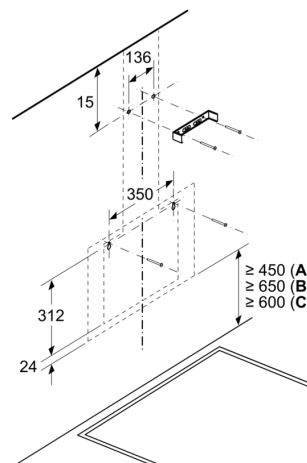

- A: Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

Measurements in mm

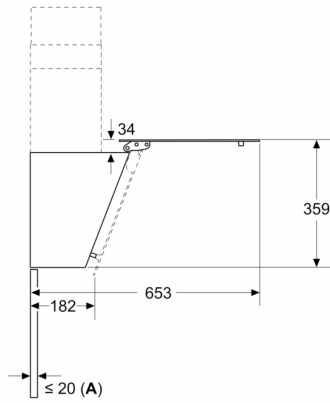

A: Max. back wall thickness