

Series 6, Built-in fridge-freezer with freezer at bottom, 177.2 x 55.8 cm, soft close flat hinge KIN86ADD0



Optional accessories

KSZGGM00 Butter box

The spacious built-in fridge-freezer with VitaFresh XXL near <0°>, No Frost and constant temperature level keeps your food fresh for longer.

- **VitaFresh XXL Pro near 0°C:** climate-controlled compartments lock in freshness and nutrients for longer.
- **NoFrost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.
- **Eco Airflow:** maintains optimal air circulation and a constant temperature level throughout the cooling area.
- **Two cooling systems:** separately controllable fridge and freezer compartments
- **High-stability door trays:** more height means more flexible space and stability.

Technical Data

Energy Efficiency Class:D
 Average annual energy consumption in kilowatt hour per year (kWh/a): 186 kWh/annum
 Sum of volume of frozen compartments: 76 l
 Sum of volume of chill compartments: 184 l
 Airborne acoustical noise emissions :35 dB(A) re 1 pW
 Airborne acoustical noise emission class:B
 Built-in / Free-standing: Built-in
 Door panel options: Possible but accessory
 Height: 1772 mm
 Width of the appliance: 558 mm
 Depth: 548 mm
 Min. required niche size for installation (HxWxD): 1775.0 x 560 x 550 mm
 Net weight: 58.2 kg
 Fuse protection: 10 A
 Door hinge: Right reversible
 Voltage: 220-240 V
 Frequency: 50 Hz
 Length electrical supply cord: 230.0 cm
 Number of compressors: 1
 Number of independent cooling systems: 2
 Interior ventilator: No
 Reversible Door Hinge: Yes
 Number of Adjustable Shelves in fridge compartment: 2
 Shelves for Bottles: Yes
 Frost free system: Freezer
 Installation typology: Integrated



Series 6, Built-in fridge-freezer with freezer at bottom, 177.2 x 55.8 cm, soft close flat hinge KIN86ADD0

The spacious built-in fridge-freezer with VitaFresh XXL near 0°, No Frost and constant temperature level keeps your food fresh for longer.

- Built-in fridge-freezer
- easy Installation
- Fixed hinge, SoftClosing Door - dampens door movement, for smooth and effortless closure

Performance and Consumption

- EU19_EEK_D: D
- Total Volume : 260 l
- Annual Energy Consumption: 186 kWh/a
- Noise Level : 35 dB , EU19_Noise emission class_D: B

Functions

- Bright interior LED fridge light in fridge section

Design features

- NO_FROST_NEU_BL, never have to defrost ever again
- Separate, electronic temperature control with LED display
- Super Cooling: automatic deactivation
- Two separate cooling circuits allow independent temperature control and prevents the transference of humidity between the fridge and freezer cavity
- Optical and accoustical
- EU19_Fast freezer facility_D
- VarioZone - adaptable storage for more flexibility

Design features

- Net Fridge Volume : 184 l
- 4 safety glass shelves in fridge compartment of which 2 are height adjustable
- 1 removable door storage compartments.
- Metal bottle rack
- Door shelves in fridge door: 1 large and 1 small.
- 3 door trays, including 1x dairy compartment

Freshness System

- 1 VitaFresh drawer with humidity control - Fruits and vegetables retain vitamins and stay fresh for longer

Food freshness system

- Net Freezer Volume : 76 l
- Freezing capacity 24h : 8 kg
- SuperFreeze function with automatic deactivation
- Temperature rise time : EU19_Temperature rise time_D: 11 H
- 3 freezer drawers

Dimension and installation

- Dimensions: 177.2 cm H x 55.8 cm W x 54.8 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

Key features - Fridge section

- Right hinged door, door reversible
- Height adjustable front feet
- Climate Class: SN-ST
- 220 - 240 V
- Length of power cord: 230 cm

Key features - Freezer section

- 3 x egg tray, 1 x ice cube tray

Country Specific Options



- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

Design features

Dimension and installation

Additional features

Series 6, Built-in fridge-freezer with freezer at bottom, 177.2 x 55.8 cm, soft close flat hinge KIN86ADD0

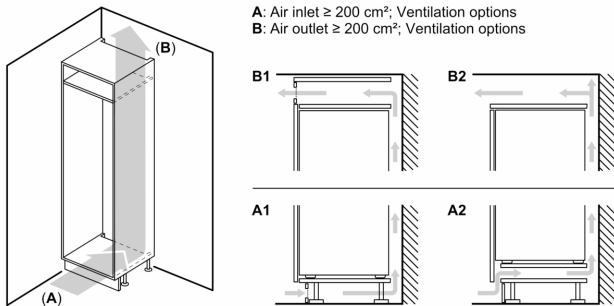

Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

Δ : Weight

A: Appliance door height including hinges in mm




B: Undamped hinge, unit front in kg

C: Damped hinge, unit front in kg

D: Additional possible load in kg with heavy load kit


A	B	C	D
1500-1750	22	22	
720-1400	19	19	
A1	15	19	B+5 / C+5
A2	15	19	

Measurements in mm

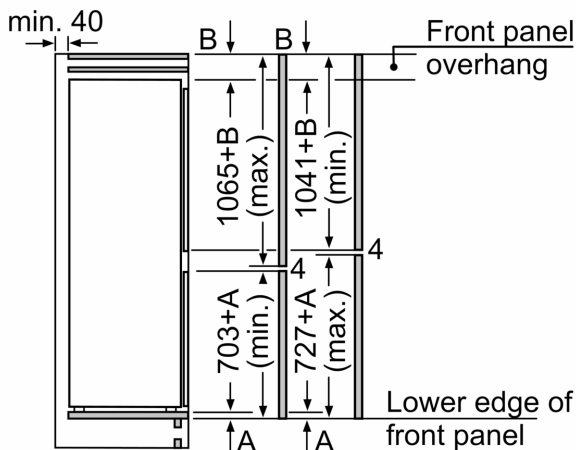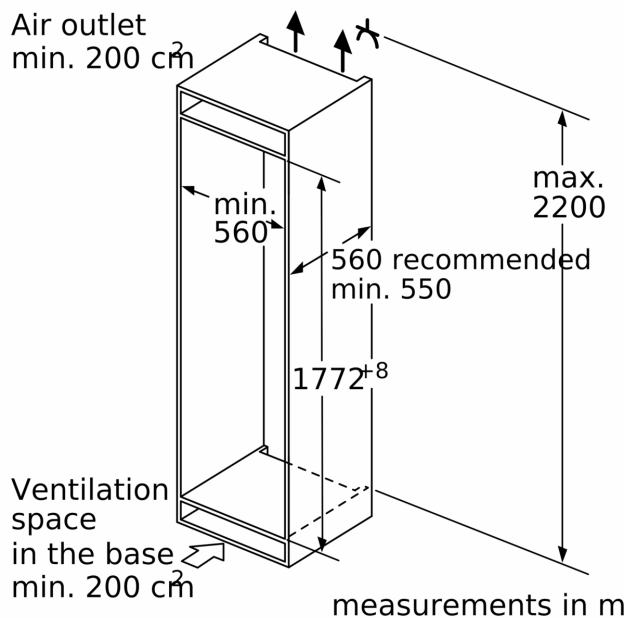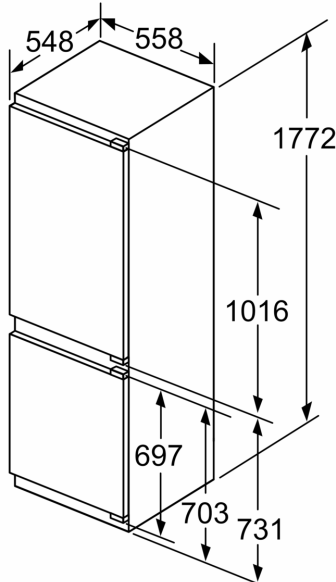

measurements in mm

Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The specified unit door dimensions are valid for a door gap of 4 mm.

measurements in mm

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.