

KS110XE

Product family	Hood
Hood Type	Decorative wall hood
Design	T flat
Extraction	Expulsion
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201869
Hood width	110 cm



Aesthetics

Colour	Stainless steel	Aesthetics	Universal
Finishing	Brushed	Logo	Embossed

Controls

Control setting	Electronic buttons
-----------------	--------------------

Programme / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features

			No. of lights	2	Anti-grease filters	Aluminium
			Light type	LED	Filter replacement indicator	Yes
			Light power	1 W	Vent outlet	150 mm
			Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	750 mm
			Free outlet maximum capacity	800 m³/h	Minimum distance from ELECTRIC hob	650 mm
			Motor power	275 W		

No. of filters 3 Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	295	51
Speed 2	395	58
Speed 3	513	64
Intensive speed	702	72

Performance / Energy Label

B

Annual Efficiency Consumption (AEChood) 62 KWh/year

Energy efficiency class (EEC) B

Fluid Dynamic Efficiency (FDE) 27.9

Fluid Dynamic Efficiency class (FDEC) B

Lighting Efficiency (LE) 84.1 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 78.7 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at mininum speed (Qmin) 295 m³/h

Maximum extraction rate 513 m³/h

Intensive extraction rate 702 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 51 dB(A)

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 64 dB(A)

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 72 dB(A)

Power consumption in stand-by mode (Ps) 0.49 W

Time increase factor (F) 1.00

Measured air flow rate at best efficiency point (Qbep) 373 m³/h

Measured air pressure at best efficiency point (Qbep) 430 Pa

Measured electric power input at best efficiency point (Wbep) 160 W

Normal Power of the light system (WI) 2 W

Average illumination of the light on the cooking surface (Emiddle) 370 lux

Sound power level at highest setting (Lwa) 64 dB(A)

Electrical Connection

Nominal power 278 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm

Also available

Alternative colours
available

Black, Cream


Available colours

KS110BLE - KS110PE


Optional accessories

Charcoal filter

FLT4

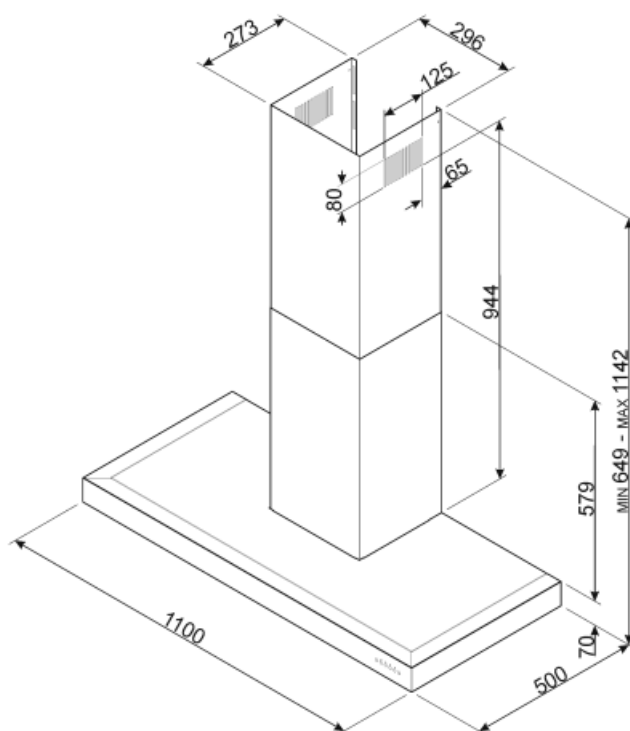

Not included accessories



FLT4

Charcoal filter Kit 1 piece



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.