

# KSG9P4X



|                      |                                       |
|----------------------|---------------------------------------|
| Product family       | Hood                                  |
| Hood Type            | Integrated hood                       |
| Design               | Fully integrated                      |
| Extraction           | Ducted out or re-circulation possible |
| Electronic control   | Yes                                   |
| Perimeter extraction | Yes                                   |
| Material             | Stainless steel                       |
| Type of steel        | Brushed                               |
| EAN code             | 8017709319380                         |
| Hood width           | 90 cm                                 |



## Aesthetics

|            |                 |           |             |
|------------|-----------------|-----------|-------------|
| Aesthetics | Universal       | Finishing | Brushed     |
| Colour     | Stainless steel | Logo      | Silk screen |

## Controls

|                 |                            |            |       |
|-----------------|----------------------------|------------|-------|
| Control setting | Touch control back-lighted | Led colour | White |
|                 | White                      |            |       |

## Programs / Functions

|                         |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| No. of speeds           | 3                                                                                   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-vent 2.0           |  |

## Technical Features

|                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |  |  |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|
|  |  |  |  |  |  |  |
| No. of lights                                                                      | 2                                                                                   | No. of filters                                                                      | 2                                                                                   |                                                                                     |  |  |
| Light type                                                                         | LED                                                                                 | Anti-grease filters                                                                 | Aluminium                                                                           |                                                                                     |  |  |
| Light power                                                                        | 2,3 W                                                                               |                                                                                     |                                                                                     |                                                                                     |  |  |
| Dimmer mode                                                                        | Yes                                                                                 |                                                                                     |                                                                                     |                                                                                     |  |  |

|                                |                  |                                    |        |
|--------------------------------|------------------|------------------------------------|--------|
| Light colour temperature range | 2700° - 4000° °K | Filter replacement indicator       | Yes    |
| Free outlet maximum capacity   | 730 m³/h         | Vent outlet                        | 150 mm |
| Motor power                    | 230 W            | Minimum distance from GAS hob      | 650 mm |
|                                |                  | Minimum distance from ELECTRIC hob | 650 mm |
|                                |                  | Non return valve                   | Yes    |

|                 | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|-----------------|----------------------------------|------------------------------------|
| Speed 1         | 243                              | 45                                 |
| Speed 2         | 362                              | 53                                 |
| Speed 3         | 481                              | 59                                 |
| Intensive speed | 697                              | 67                                 |


## Performance / Energy Label

A

|                                                                                 |             |                                                                                |          |
|---------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------|----------|
| Annual Efficiency Consumption (AEChood)                                         | 53 KWh/year | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 60 dB(A) |
| Energy efficiency class (EEC)                                                   | A           | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 67 dB(A) |
| Fluid Dynamic Efficiency (FDE)                                                  | 30.1        | Power Consumption in Off mode (Po)                                             | 0.49 W   |
| Fluid Dynamic Efficiency class (FDEC)                                           | A           | Time increase factor (F)                                                       | 0.9      |
| Lighting Efficiency (LE)                                                        | 31.1 lux/W  | Energy Efficiency Index per first cavity                                       | 52.6     |
| Lighting Efficiency Class (LEC)                                                 | A           | Measured air flow rate at best efficiency point (Qbep)                         | 369 m³/h |
| Grease Filtering Efficiency (GFE)                                               | 77.9 %      | Measured air pressure at best efficiency point (Qbep)                          | 446 Pa   |
| Grease Filtering Efficiency Class (GFEC)                                        | C           | Measured electric power input at best efficiency point (Wbep)                  | 152 W    |
| Air flow at mininum speed (Qmin)                                                | 242 m³/h    | Normal Power of the light system (WI)                                          | 5 W      |
| Maximum extraction rate                                                         | 481 m³/h    | Average illumination of the light on the cooking surface (Emiddle)             | 143 lux  |
| Intensive extraction rate                                                       | 697 m³/h    | Sound power level at highest setting (Lwa)                                     | 60 dB(A) |
| Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) | 45 dB(A)    |                                                                                |          |

## Electrical Connection

|               |           |                           |          |
|---------------|-----------|---------------------------|----------|
| Nominal power | 235 W     | Frequency (Hz)            | 50-60 Hz |
| Voltage       | 220-240 V | Power supply cable length | 1500 mm  |

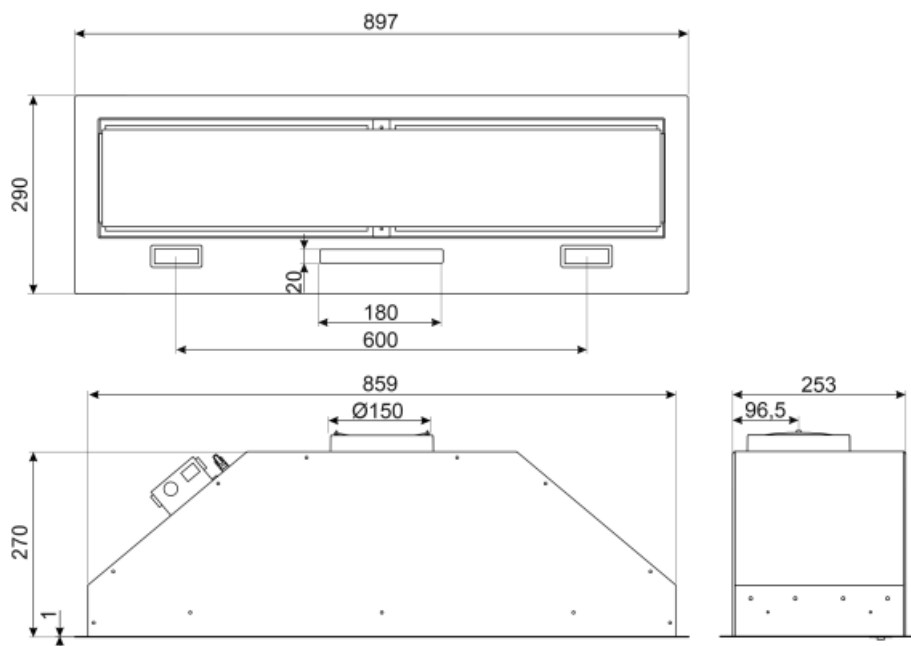

---

## Not included accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

|                                                                                  |                                                                                                                                                           |                                                                                   |                                                                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | A: Product drying performance, measured from A+++ to D / G depending on the product family                                         |
|  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                                                   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.                                                                                                   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Perimeter extraction panels: very efficient and aid noise reduction.                                                                                      |  | Intensive/turbo setting: when extra fast extraction is required.                                                                   |
|  | ...                                                                                                                                                       |  | ...                                                                                                                                |
|  | ...                                                                                                                                                       |                                                                                   |                                                                                                                                    |