SI964XM

Product Family	Hob
Built-in	Traditional
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709275839



Aesthetics

Colour	Stainless steel
Aesthetics	Victoria
Material	Stainless Steel
Frame	Yes
Frame colour	Steel effect
Type of control setting	Control knobs
Slider	Red
Control knobs position	Front
No. of controls	4
Controls colour	Chrome
Serigraphy colour	Black
Alternative colours available	White, Stainless steel, Cream

Programme / Functions

Total no. of cook zones	4
No. of induction cook zones	4
No. of cooking zones with booster	4
Power levels	9

Options

Standard cut out	478-482x555-560 mm	**Control Lock / Child Safety**	Yes
Limited Power Consumption Mode	Yes	**Quick start**	Yes
Limited Power Consumption Mode in W	1900, 2600, 3000, 3800, 4500 W		

Technical Features

Front left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm
Rear left - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm
Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm
Front right - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

Automatic setting according to pan dimension	Yes	**Automatic switch off when overheat**	Yes
Automatic pan detection	Yes	**Residual heat indicator**	Yes
Minimum pan diameter indication	Yes	**Protection against accidental start up**	Yes

Electrical Connection

Nominal power (W)	7400 W	**Type of electric cable**	Single and Double phase
Current	33 A	**Frequency (Hz)**	50/60 Hz
Voltage (V)	220-240 V	**Terminal Box**	6 poles
Voltage 2 (V)	380-415 V		

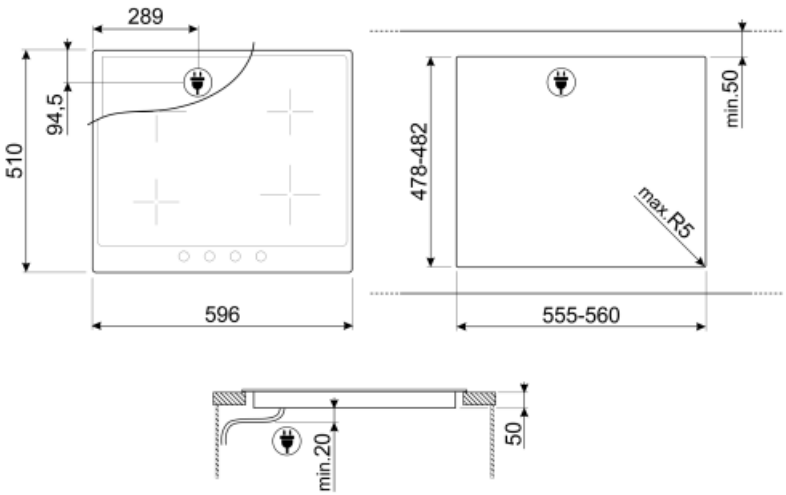

Not included accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



CUT_OUT_STANDARD_72dpi



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Knobs control