

VSTR34BRX

Sink material	Stainless steel
Sink type	Single-pressed bowl
No. of bowls	1
EAN code	8017709303006



Aesthetics



Aesthetics	Universal	Building in type	Undermount
Series	Mira	Logo	Embossed
Colour	Brass	Tap hole / precut tap hole	No Taphole
Finishing	PVD Brushed		

	Bowl type	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner bowl	Overflow	Strainer position	Strainer dimension
Bowl	Minimum radius	340 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"

Technical Features




Characteristics composite material	Coating thickness , Eco-friendly, Pre-assembled gasket, Hypoallergenic	Tap hole diameter	35 mm
Dimensions of the product (mm)	200x382x442 mm	No. of clips	4
Cutout dimension undermount (mm)	344*404 mm	Type of clips	Undermount clip
Base unit size	45 cm		

Accessories Included

Accessories for
installation

Strainer, Fixing clips

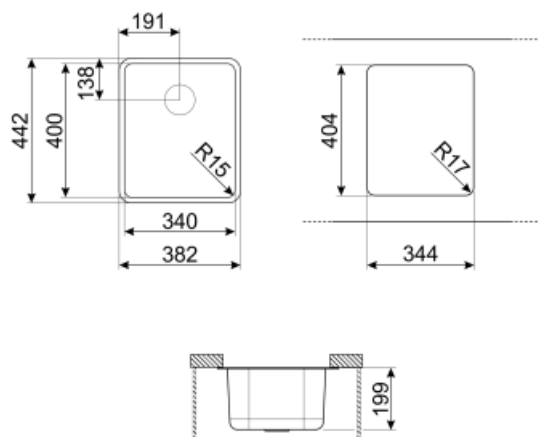

Not included accessories



KITFD050

Waste disposal 0,5 HP Motor: 1/2 horsepower Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP Motor: 1 horsepower Fits all sinks with 3 1/2" waste outlet



3713

Siphon double bowls sinks (dishwasher connection included)



KITFD075

Waste disposal 0,75 HP Motor: 3/4 horsepower Fits all sinks with 3 1/2" waste outlet



KITFD100UK

Waste disposal 1 HP Motor: 1 horsepower Fits all sinks with 3 1/2" waste outlet



DB34

Cestello in filo inox per abbinamento alle vasche di dimensione 340*400 mm



3712

Siphon single bowl sinks (dishwasher connection included)



KITFD075UK

Waste disposal 0,75 HP Motor: 3/4 horsepower Fits all sinks with 3 1/2" waste outlet



KITFD050UK

Waste disposal 0,5 HP Motor: 1/2 horsepower Fits all sinks with 3 1/2" waste outlet

Symbols glossary

	Cupboard width required for sink installation		Sink depth - depending on the model, the depth can be from 13 to 24,5
	Under table top installation: The sink is fixed under tabletop, which extends the work surface and the depth of the sink.		Easy to clean
	Coating thickness between 0.2mm and 2mm		PVD coatings are hypoallergenic and suitable for use in contact with food
	The manufacturing process of PVD treatment is 100% green and eco-friendly		