N 90, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE
GI7815CE0G







This NoFrost built-in freezer needs no defrosting and features a malfunction warning signal in case of increasing temperature.

- √ No Frost – No more defrosting your freezer.
- √ Vario Zone – Personalise your drawers with various loading options to find the perfect fit.
- √ Home Connect – Add your smart fridge to your home network and stay connected to your kitchen.
- √ Soft Close – Enjoy the silence. The door softly closes itself when at an angle of 20 degrees.

Included accessories

1 x ice cube tray

Optional accessories

KS0B0SZ0	Heavy-duty hinge support

Features

Technical Data

Energy Efficiency Class[1]: ..... E
Average annual energy consumption in kilowatt hour per year (kWh/a): ..... 235 kWh/a
Sum of volume of frozen compartments: ..... 212 l
Airborne acoustical noise emissions : ..... 35 dB(A) re 1pW
Airborne acoustical noise emission class: ..... B
Thermometer freeze section: ..... Digital
Light: ..... No
Product category: ..... Upright freezer
Built-in / Free-standing: ..... Built-in
Door panel options: ..... Not possible
Frost free system: ..... Fridge and freezer
Height of the appliance: ..... 1772 mm
Width of the appliance: ..... 558 mm
Depth: ..... 545 mm
Required niche size for installation (HxWxD): ..... 1775 x 560 x 550 mm
Dimensions of the packed product (HxWxD): ..... 1840 x 610 x 640 mm
Net weight: ..... 67.2 kg
Gross weight: ..... 71.9 kg
Connection Rating: ..... 120 W
Fuse protection: ..... 13 A
Frequency: ..... 50 Hz
Length electrical supply cord: ..... 230.0 cm
Door hinge: ..... Left reversible
Defrost: ..... Automatic
Warning signal / malfunction: ..... Both visual and audible
Door lock: ..... No
Number of drawers/baskets (Stck): 5
Number of freezing flaps (Stck): 2
EAN code: 4242004250227
Brand: ..... Neff
Product name / Commercial code: GI7815CE0G
Product category: ..... Upright freezer
Included accessories: ..... 1 x ice cube tray

4 242004 250227

[1] Scale of Energy Efficiency Classes from A to G

N 90, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE
GI7815CE0G

Features

Functions
- Fixed hinge
- Fixed hinge

Design features
- NO_FROST_NEU_BL, never have to defrost ever again
- Home Connect: Remote Monitoring and Control
- Electronic control (7 segment display)
- 1 compressor/1 cold circuit
- SuperFreeze function with automatic deactiviation
- SoftClose door - dampens door movement, for smooth and effortless closure
- Ventilation in plinth, the plinth size can be varied
- Automatic defrost freezer
- Acoustic warning system
- Freezer malfunction warning signal: optical, acoustical

Food freshness system
- 5 freezer drawers
- 2 hinged freezer compartment
- Safety glass shelves between freezer drawers

Key features - Fridge section
- Left hinged door, reversible
- Connection value 120 W
- 220 - 240 V

Dimension and installation
- Dimensions: 177.2 cm H x 55.8 cm W x 54.5 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

Key features - Freezer section
- 1 ice cube tray

Design features


Dimension and installation


Additional features

Performance and Consumption
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- EU19_EEK_D: E
- Total Volume : 212 l
- Net Fridge Volume : 0 l
- Net Freezer Volume : 212 l
- Net 4* compartment volume : 212 l
- Freezing capacity 24h : 14 kg
- Annual Energy Consumption: 235 kWh/a
- Climate Class: SN-T
- Noise Level : 35 dB , EU19_Noise emission class_D: B
- Temperature rise time : EU19_Temperature rise time_D: 9 H


N 90, BUILT-IN FREEZER, 177.2 X 55.8 CM, SOFT CLOSE FLAT HINGE
GI7815CE0G


Dimensioned drawings

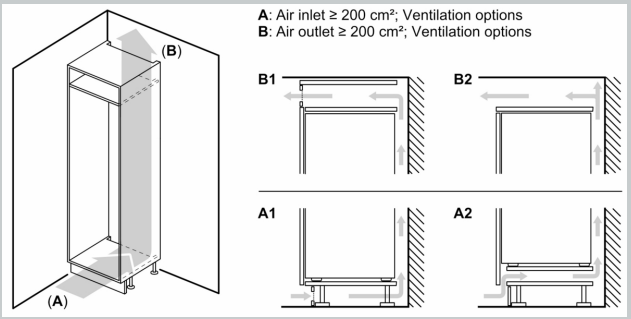

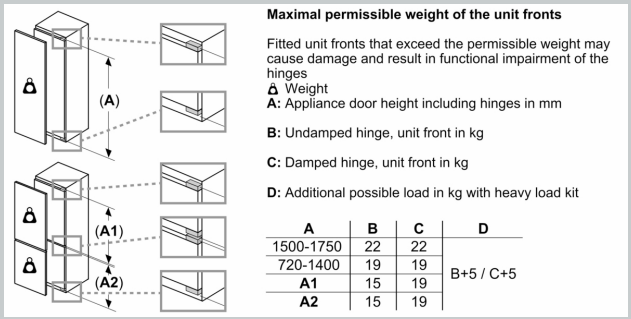


A	B	C	D
1500-1750	22	22	
720-1400	19	19	
A1	15	19	B+5 / C+5
A2	15	19	

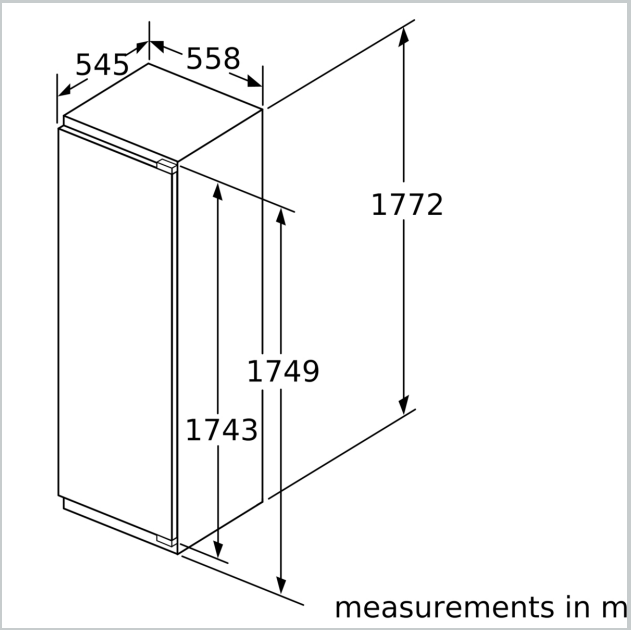

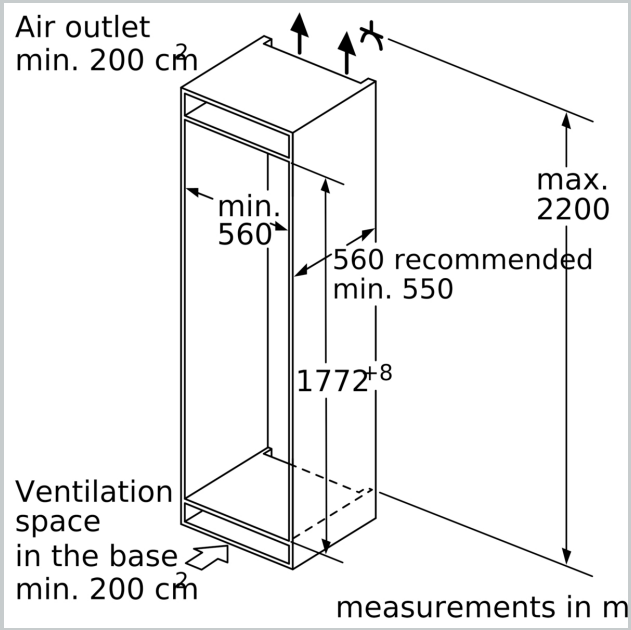


Dimensioned drawings

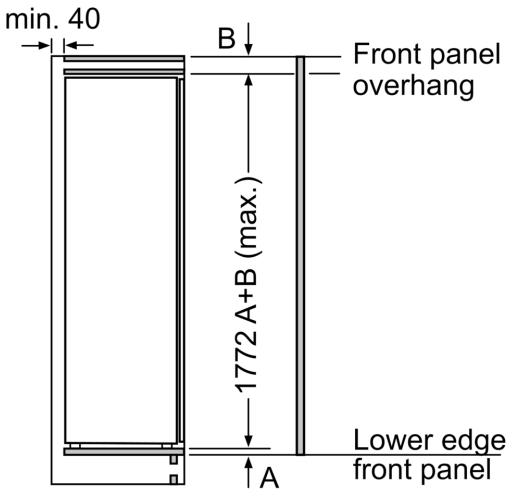

measurements in mm


Maximal permissible weight of the unit fronts



Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door Hinges in mm:	undamped hinge, Door in kg:	damped hinge, Door in kg:
1500-1750	22	22

measurements in mm
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.