

iQ700, Domino gas hob, 30 cm,
Ceramic
ER3A6AD70



Gas cooktop with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology: precise heat control with nine different flame steps.
- ✓ The 7-segment display informs about the chosen power level.
- ✓ The dual wok burner with dual flame system and 6 kW of power is ideal for a wide variety of foods, even in large quantities.
- ✓ Dishwasher proof pan supports: extremely easy to remove and clean in the dishwasher.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.

Features

Technical Data

Product name/family : Vario/Domino gas hob w control
Construction type : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 1
Required niche size for installation (HxWxD) : 45 x 270 x 490-500
Width of the appliance : 302
Dimensions : 45 x 302 x 520
Dimensions of the packed product (HxWxD) (mm) : 185 x 385 x 578
Net weight (kg) : 8.293
Gross weight (kg) : 9.1
Basic surface material : Ceramic
Color of surface : Alu, brushed, Black
Color of frame : Black
Approval certificates : CE, Eurasian, Ukraine
Length of electrical supply cord (cm) : 100
EAN code : 4242003742631
Electrical connection rating (W) : 2
Gas connection rating (W) : 6000
Current (A) : 3
Voltage (V) : 220-240
Frequency (Hz) : 60; 50



Included accessories

1 x WOK attachment ring

Optional accessories

HZ394301 Connecting strip

iQ700, Domino gas hob, 30 cm, Ceramic ER3A6AD70

Features

Design

- ceramic glass surface, black
- Facette front, rear and side profiles, aluminium, brushed
- Cast iron pan supports
- Low profile burner: elegant burner design

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Electronic power level display: see the selected power level and the residual heat.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 1 burner gas hob including:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Center front: wok burner up to 6 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- Residual heat indicator: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Natural gas L 25 mbar (NL)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
-
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 302 x 520
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 6 KW


Accessories

- Wok ring included

iQ700, Domino gas hob, 30 cm,
Ceramic
ER3A6AD70


Dimensioned drawings

measurements in mm
Picture for the table Domino combination possibilities
with corresponding devices and cutout dimensions




If two or more elements are installed
right next to one another, one or
several installation kits are required
(2 elements 1 installation kit, 3
elements 2 installation kits, etc.).
Cutout dimension (X) depending on
the combination see table:

measurements in mm

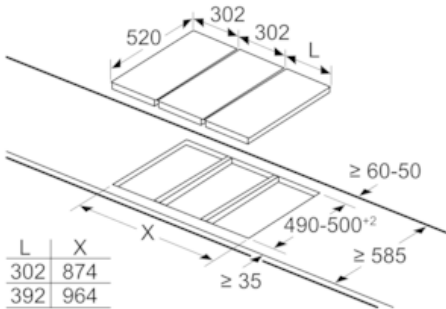

When installing two or more Domino units
side-by-side, one or more assembly kits are
required (2 units = 1 assembly kit, 3 units = 2
assembly kits, etc.).


measurements in mm

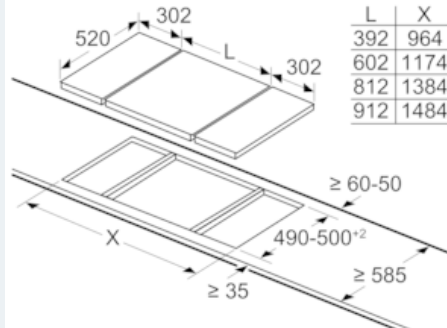

When installing two Domino units right next to
a hob, two assembly kits (HZ394301)
are required.


measurements in mm

Assembly kit (HZ394301) for Domino

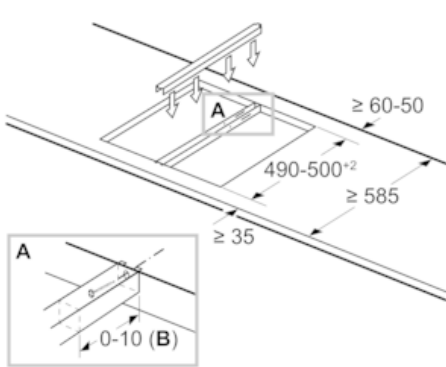


B: Dependent on the cut-out depth

measurements in mm

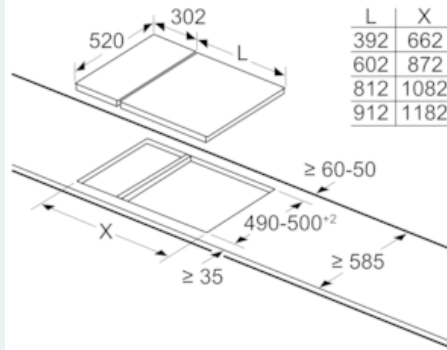

When installing a Domino unit right next to a
hob, an assembly kit (HZ394301) is required.

measurements in mm

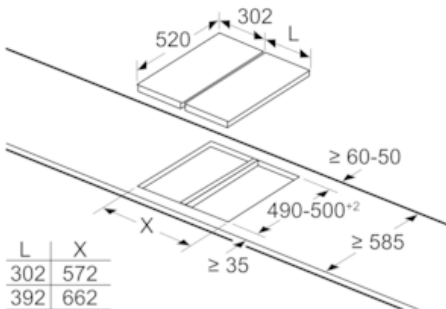

When installing two or more Domino units
side-by-side, one or more assembly kits are
required (2 units = 1 assembly kit, 3 units = 2
assembly kits, etc.).


iQ700, Domino gas hob, 30 cm,
Ceramic
ER3A6AD70

Dimensioned drawings

measurements in mm
Domino combination options with corresponding
appliance and cut-out dimensions

Width category: 30 40 60 70 80 90
Appliance width: 302 392 602 710 812 912

	A	B	C	D	L	X
2x30	302	302	-	-	604	572
1x30, 1x40	302	392	-	-	694	662
1x30, 1x60	302	602	-	-	904	872
1x30, 1x70*	302	710	-	-	1012	980
1x30, 1x80	302	812	-	-	1114	1082
1x30, 1x90	302	912	-	-	1214	1182
2x40	392	392	-	-	784	752
1x40, 1x60	392	602	-	-	994	962
1x40, 1x70*	392	710	-	-	1102	1070
1x40, 1x80	392	812	-	-	1204	1172
1x40, 1x90	392	912	-	-	1304	1272
3x30	302	302	302	-	906	874
2x30, 1x40	302	302	392	-	996	964
2x30, 1x60	302	302	602	-	1206	1174
2x30, 1x70*	302	302	710	-	1314	1282
2x30, 1x80	302	302	812	-	1416	1384
2x30, 1x90	302	302	912	-	1516	1484
1x30, 2x40	302	392	392	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	1296	1264
1x30, 1x40, 1x70*	302	392	710	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	1606	1574
3x40	392	392	392	-	1176	1144
2x40, 1x60	392	392	602	-	1386	1354
4x30	302	302	302	302	1208	1176
3x30, 1x40	302	302	302	392	1298	1266
2x30, 2x40	302	302	392	392	1388	1356
1x30, 3x40	302	392	392	392	1478	1446

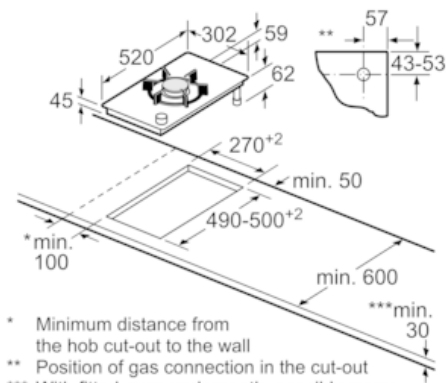

- * Minimum distance from the hob cut-out to the wall
- ** Position of gas connection in the cut-out
- *** With fitted oven underneath, possibly more; see space requirements for the oven

measurements in mm