
N 90, Domino gas hob, 30 cm, Ceramic
N23TA29N0

COOKING PASSION SINCE 1877



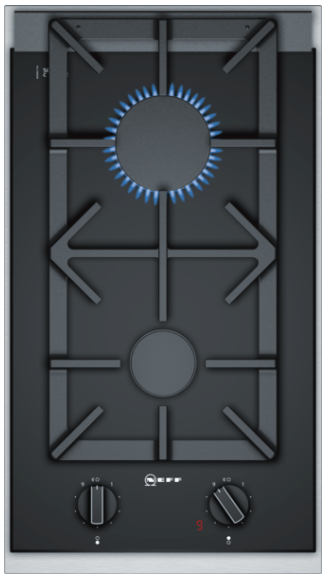

The gas hob with heat-resistant ceramic glass surface and adjustable FlameSelect control.

- √ Ceramic Glass Surface - extremely easy-to-clean surface.
- √ FlameSelect® - thanks to the clever control of gas flow, the flame can be precisely adjusted in 9 steps.
- √ 7-Segment Display with Residual Heat Indicator - a digital display showing the remaining heat.
- √ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- √ Sword Knobs - a better feel and easier to operate, the new knob in an attractive design.

Optional accessories

Z9914X0	Connecting strip

Features

Technical Data

Product name/family : Vario/Domino gas hob w control
Construction type : Built-in
Energy input : Gas
Total number of positions that can be used at the same time : 2
Required niche size for installation (HxWxD) : 45 x 270 x 490-500
Width of the appliance : 306
Dimensions : 45 x 306 x 546
Dimensions of the packed product (HxWxD) (mm) : 185 x 397 x 646
Net weight (kg) : 6.952
Gross weight (kg) : 8.0
Basic surface material : Ceramic
Color of surface : Black, Stainless steel
Color of frame : Black, Stainless steel
Approval certificates : CE, Eurasian
Length of electrical supply cord (cm) : 100
EAN code : 4242004203292
Electrical connection rating (W) : 2
Gas connection rating (W) : 4700
Current (A) : 3
Voltage (V) : 220-240
Frequency (Hz) : 60; 50

4 242004 203292

N 90, Domino gas hob, 30 cm, Ceramic

N23TA29N0

COOKING PASSION SINCE 1877

Features

Design

- ceramic glass surface, black
- Bevelled design, stainless steel
- black cast iron pan supports with protective rubber feet
- Low profile burner: elegant burner design

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- LED display for each zone: see the selected power level and the residual heat.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 2 burner hob
- Center front: Standard burner up to 1.9 KW (depending on gas type)
- Center rear: High speed burner up to 2.8 KW (depending on gas type)

Safety


- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 2 stage residual heat indicator: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
  NG H/E 20mbar, E+ 20/25mbar
  Natural gas H 25 mbar (HU)
  Natural gas L 25 mbar (NL)
  Liquid gas G30,31 28-30/37mbar
  Liquid gas G30 37 mbar (PL)
  Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 47 x 306 x 546
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 4.7 KW

Dimensioned drawings


measurements in mm

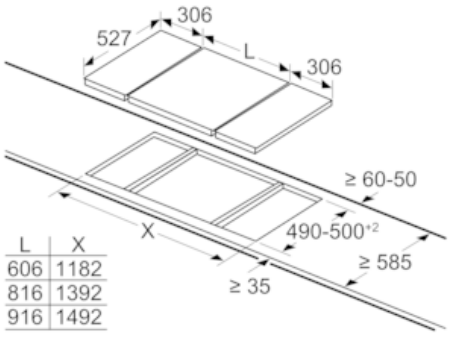

L	X
606	1182
816	1392
916	1492

When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required.


measurements in mm

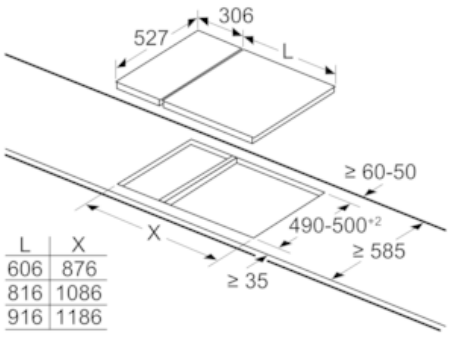

L	X
606	876
816	1086
916	1186

When installing a Domino unit right next to a hob, an assembly kit (HEZ394301) is required.


measurements in mm

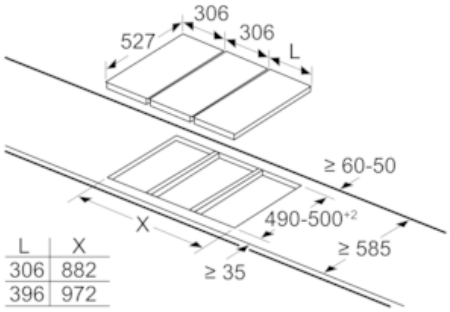


L	X
306	882
396	972

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).


measurements in mm
Assembly kit (HEZ394301) for Domino

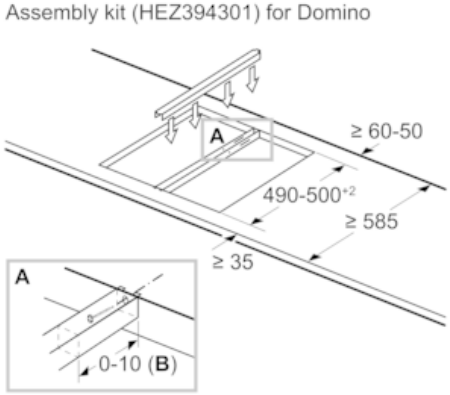

B: Dependent on the cut-out depth

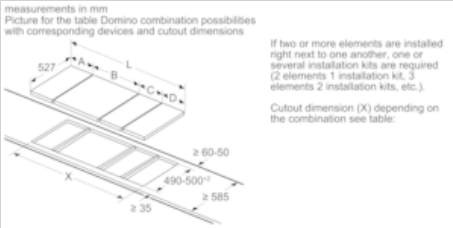


measurements in mm

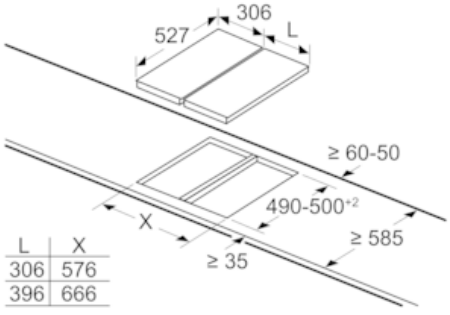

L	X
306	576
396	666

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc.).

Dimensioned drawings

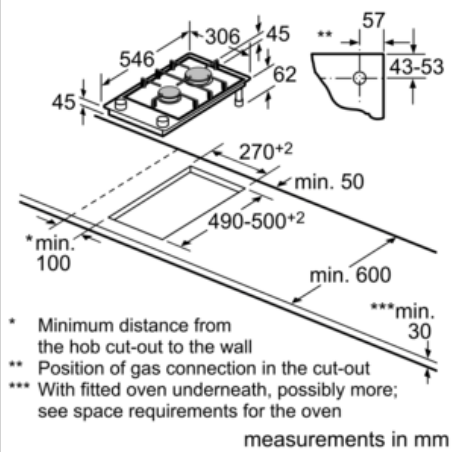

measurements in mm
Domino combination options with corresponding appliance and cut-out dimensions

Width category:
Appliance width:

	A	B	C	D	L	X		
2x30	306	306	-	-			612	**576**
1x30, 1x40	306	396	-	-			702	**666**
1x30, 1x60	306	606	-	-			912	**876**
1x30, 1x70*	306	708	-	-			1014	**980**
1x30, 1x80	306	826	-	-			1132	**1086**
1x30, 1x90	306	918	-	-			1224	**1186**
2x40	396	396	-	-			792	**756**
1x40, 1x60	396	606	-	-			1002	**966**
1x40, 1x70*	396	708	-	-			1104	**1070**
1x40, 1x80	396	826	-	-			1222	**1176**
1x40, 1x90	396	918	-	-			1314	**1276**
3x30	306	306	306	-			918	**882**
2x30, 1x40	306	306	396	-			1008	**972**
2x30, 1x60	306	306	606	-			1218	**1182**
2x30, 1x70*	306	306	708	-			1320	**1286**
2x30, 1x80	306	306	826	-			1438	**1392**
2x30, 1x90	306	306	918	-			1530	**1492**
1x30, 2x40	306	396	396	-			1098	**1062**
1x30, 1x40, 1x60	306	396	606	-			1308	**1272**
1x30, 1x40, 1x70*	306	396	708	-			1410	**1376**
1x30, 1x40, 1x80	306	396	826	-			1528	**1482**
1x30, 1x40, 1x90	306	396	918	-			1620	**1582**
2x40, 1x60	396	396	606	-			1398	**1362**
4x30	306	306	306	306			1224	**1188**
3x30, 1x40	306	306	306	396			1314	**1278**
1x30, 1x75	306	750	-	-			1056	**1020**
1x40, 1x75	396	750	-	-			1146	**1110**
2x30, 1x75	306	306	750	-			1362	**1326**
1x30, 1x40, 1x75	306	396	750	-			1452	**1416**

* Not possible with 70 cm induction hob